


6. We recommend the use of a quality cover tape on the joists. It reduces walking sound effects and protects the SubDeck joists from water (rain).
7. Unobstructed air flow is required below deck. Promote proper drainage and ventilation. Insufficient drainage and ventilation will void the warranty.

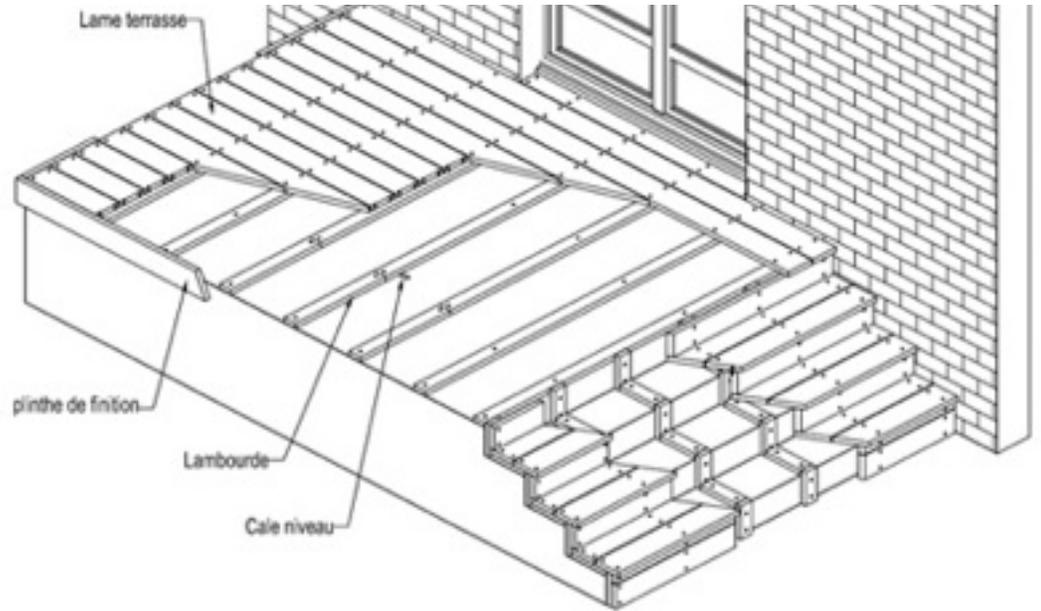

Installing Fiberon SubDeck Joists on Pedestals

If you are installing your decking on ground that is not hard-standing (gravel, sand or earth), we recommend using pedestals.

1. Pedestals should be uniformly positioned under the SubDeck joists. For residential use, space every 20”.
2. If the ground is not flat, we recommend making a thin mortar to have a stable structure.
3. Before installing the pedestals, spread a weed control film of 100gr/m² (8oz./sq.ft.) minimum, to prevent weed growth.
4. Use long screws to install the SubDeck joists on the pedestals.

If SubDeck joists are more than 3m (118” in length, we recommend installing wood spacers in between SubDeck joists to keep joists perfectly parallel to each other.

